

MULTI-USE SPRUNG TIMBER SPORTS AND ACTIVITY FLOOR

The DYNAMIK Komfort Elite Play is a low profile sprung area elastic sports floor system. It is designed to be installed onto a level screed (+/- 3mm over 3m) and incorporates an engineered hardwood board.

The system consists of a comfort-based elastic layer over which a load distribution board is installed prior to the engineered hardwood board. Consistent sports performance is guaranteed as every part of the surface is equally supported by the high density elastic layer.

FEATURES

- Meets the requirements of EN 14904
- Sport England compliant
- Ideal for overlaying existing surfaces
- Low construction height - ideal for refurbishment
- 8 coats of factory finished lacquer-seal
- 25 year warranty



SURFACE FINISHES

The Komfort Elite Play engineered hardwood board is available in three different wood species:




European Oak



Ash



Canadian Maple

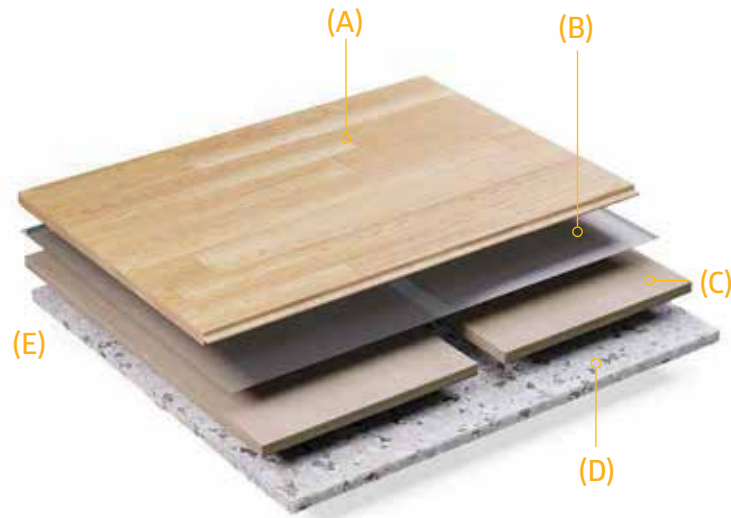

DIMENSIONS

(A) Engineered Hardwood Board:	2.2m x 180mm x 13.5mm
(B) Noise Reduction Layer - Polyethylene	0.03mm
(C) Load Distribution Board - (T & G)	2.5m x 175mm x 12mm
(D) Comfort Based Elastic Layer	10mm
(E) Total Construction Height	35.53mm

PERFORMANCE CHARACTERISTICS

Certification - EN14904	Class A3
Shock Absorption	40% < 55%
Vertical Deformation	1.8 mm < 3.5mm
Rolling Load	< 1,500 N
Ball Rebound	≥ 90%
Slip Resistance	80 - 110